



Available Reticles

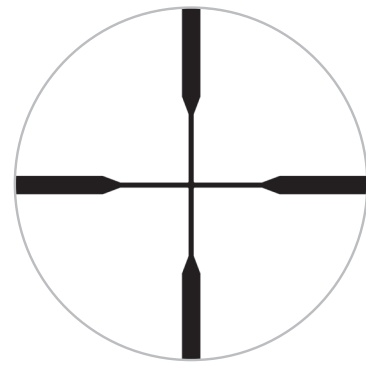


Standard Duplex

HR940-C-2700005 / 3-9x40

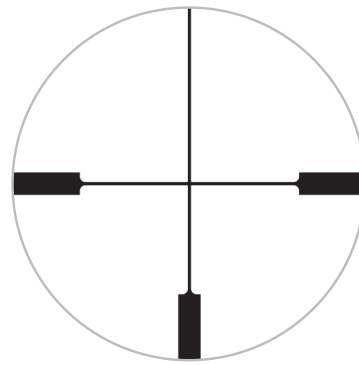

German #4


HR940-C-2700004 / 3-9x40

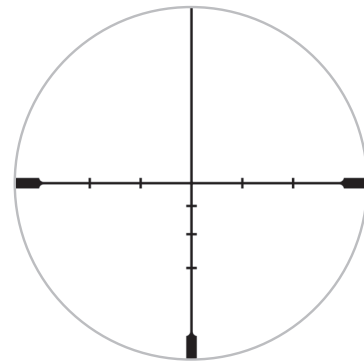

BDC Hunter Holds

HR424-C-2700001 / 1-4x24
 HR1040-C-2700002 / 2.5-10x40
 HR940-C-2700006 / 3-9x40
 HR1240-C-2700003 / 3-12x40

Reticles not shown to scale. For a full view of reticles, please visit our website at Trijicon.com.

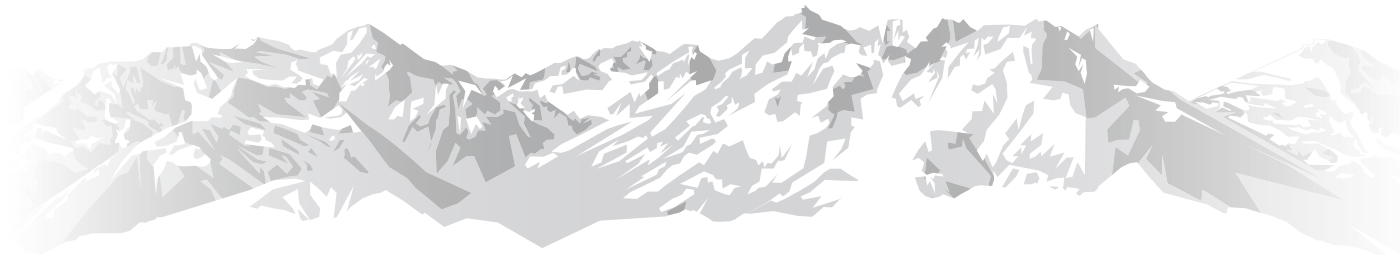

Tel: +27 12 329 4116 | Email: sales@ecmtech.co.za | www.ecmtech.co.za
 18 Eighteenth Street, Hazelwood, Pretoria, Gauteng, South Africa



Trijicon Huron®



This is the Trijicon® variable rifle scope made specifically for the North American deer hunter. The Trijicon Huron® comes with the high-quality glass, proven precision, and rugged construction you need for bragging rights every season, along with a price that lets you invest heavily in your other hunting gear.

- 1 Extreme durability and maintains zero in all conditions
- 2 Outstanding lens quality for any-light hunting
- 3 Intuitive hunting reticles for fast target acquisition
- 4 Anti-scratch glass coatings
- 5 Low-capped, easy-to-use MOA adjusters that track accurately and maintain zero

The Science of Brilliant®

At Trijicon, we are bound by a commitment to industry-leading research, design, and testing to seek innovative aiming solutions that constantly redefine "brilliant." That's why every Trijicon rifle scope design is tested to the procedures below.




- > **Alaska-to-Africa Temperature Tested**
 To ensure each family of riflescopes is ready for whatever our users put them through, we perform "Alaska-to-Africa" temperature shock tests with temps from -20°F to 140°F.
- > **Solid Zero Tested**
 Our riflescopes are designed to hold their zero giving you the precision you need. Every model is subjected to 5,000 consecutive rounds, confirming no reticle shift has occurred.
- > **Drop Tested**
 Because we don't believe every drop should be followed by a warranty claim, we drop test each rifle scope design to check for durability.
- > **Shock & Vibration Tested**
 All rifle scope models are tested to withstand recoil and vibrational stresses without malfunction, so it can take a beating before, during, and after use.
- > **Immersion Tested**
 All models are immersion tested, and every rifle scope is dry-nitrogen filled to eliminate internal fogging.

To learn more about Trijicon and The Science of Brilliant, visit Trijicon.com/Science

Features and Benefits



- A Easy-Focus Eyepiece**
Diopter accommodates the shooter's individual prescription.
- B Accurate Shot Placement at Various Distances**
Versatile magnification ranges designed for the whitetail hunter.
- C Sleek Design & Finish**
Satin finish and hunter knurling prevents snagging and allows for smooth adjustments of optic controls.
- D Quick & Easy Adjustments**
Crisp, precise, windage / elevation adjusters require no tools. Capped adjusters ensure no accidental shift.
- E Field-Ready Construction**
Ultra-lightweight ruggedized design stands up to the elements without added weight.
- F Edge-to-Edge Clarity**
Fully multi-coated broadband anti-reflective glass provides excellent light transmission, true detail and color with zero distortion.
- G Fast Scanning, Detection, and Tracking**
Extra-wide field of view for maximum situational awareness.
- H Rapid Target Acquisition**
Uncluttered, easy-to-use reticles for fast and accurate shots.

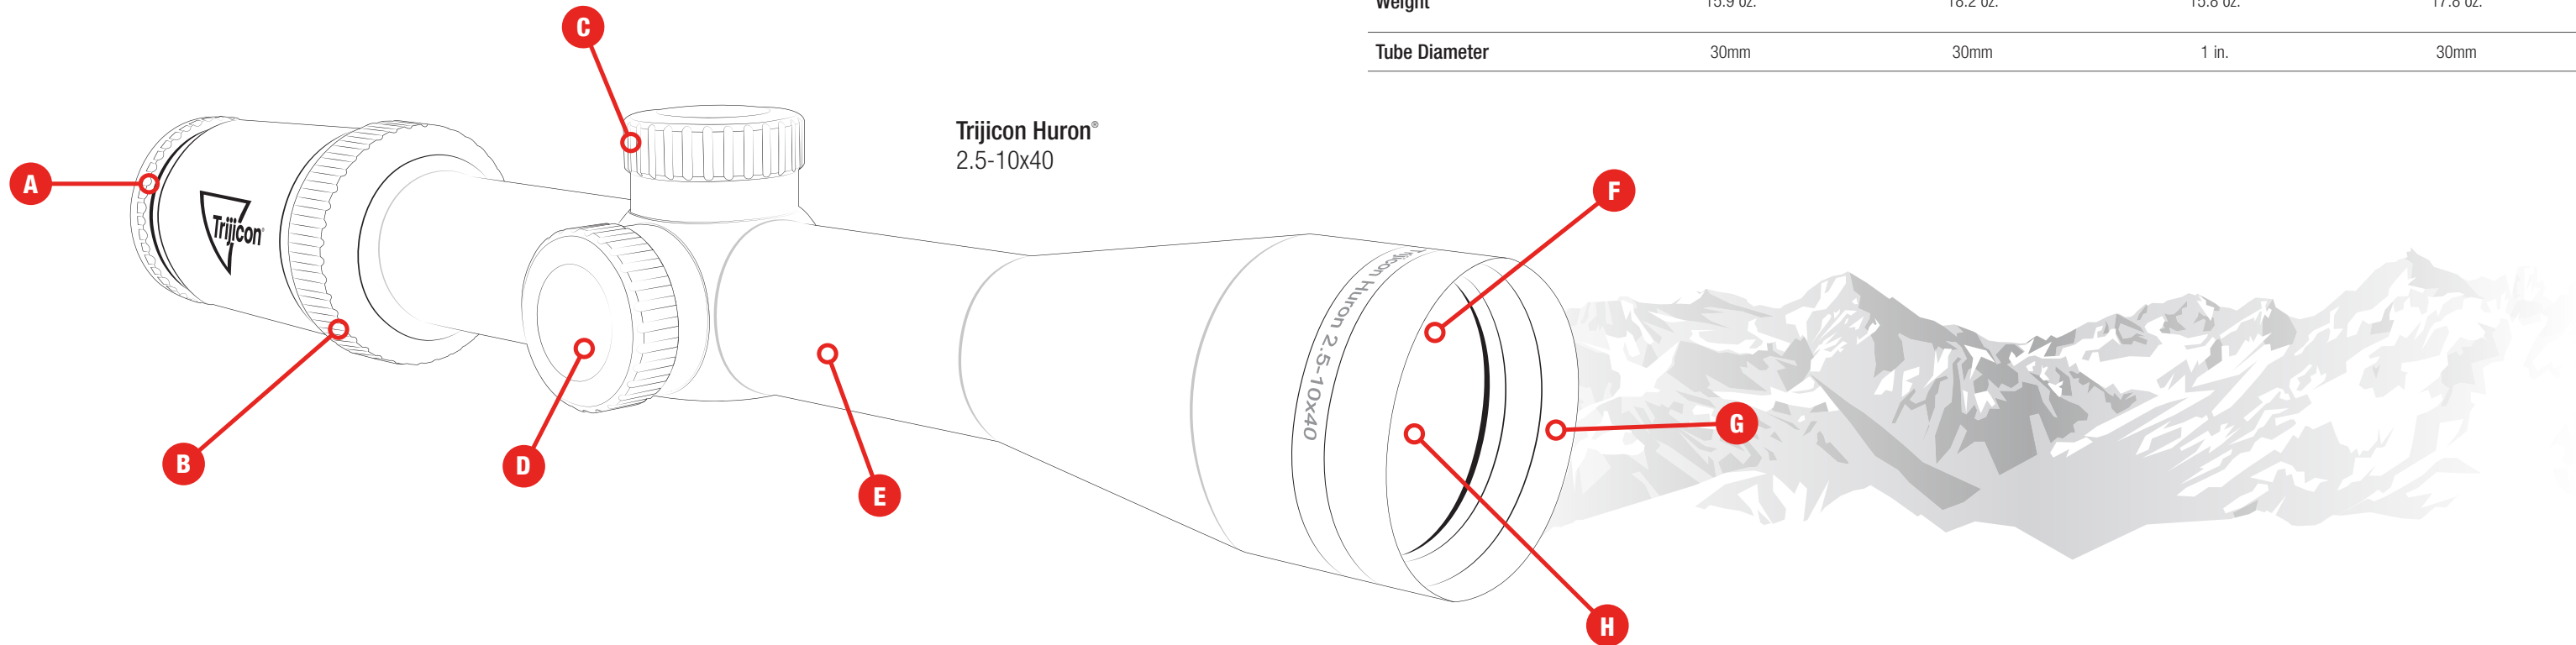

Trijicon Huron®
2.5-10x40

Specifications



	1-4x24 (HR424 Series)	2.5-10x40 (HR1040 Series)	3-9x40 (HR940 Series)	3-12x40 (HR1240 Series)
Eye Relief	2.6 – 3.9 in. 65 – 98mm	2.4 – 3.3 in. 62 – 83mm	2.5 – 3.7 in. 63 – 93mm	2.2 – 3.2 in. 55 – 81mm
Exit Pupil	0.69 – 0.2 in. 17.5 – 5.1mm	0.58 – 0.16 in. 14.8 – 4.0mm	0.52 – 0.13 in. 13.3 – 4.5mm	0.52 – 0.13 in. 13.2 – 3.4mm
Field of View (@ 100 yd.) (@ 100m) (Degrees)	95.0 – 24.2 ft. 31.7 – 8.1m 18° – 4.6°	40.2 – 10.0 ft. 13.4 – 3.3m 7.66° – 1.92°	33.8 – 11.3 ft. 11.3 – 3.8m 6.45° – 2.15°	36.3 – 9.1 ft. 12.1 – 3.0m 6.93° – 1.74°
Focal Plane	Second	Second	Second	Second
Elevation Adjuster Style	Low Capped	Low Capped	Low Capped	Low Capped
Adjustments	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click
Adjustment Range Total Travel	100 MOA	70 MOA	40 MOA	70 MOA
Finish	Satin	Satin	Satin	Satin
Dimensions (L x W x H)	10.4 x 2.0 x 1.9 in.	12.6 x 2.3 x 2.3 in.	12.2 x 2.1 x 2.1 in.	12.6 x 2.3 x 2.3 in.
Weight	15.9 oz.	18.2 oz.	15.8 oz.	17.8 oz.
Tube Diameter	30mm	30mm	1 in.	30mm